


HFI 90 L // P

Low density
Intended for use as dielectric in coaxial cables

Electrical			
Properties	Method	Conditions	Value
Dielectric constant	IEC 60250	1 MHz	2.29
Dielectric strength	IEC 60243-1	-	22 kV/mm
Dissipation factor	IEC 60250	1 MHz	0.00008
Volume resistivity	Internal	25 °C	10 ¹⁶ Ω x cm
		90 °C	10 ¹⁵ Ω x cm

Physical			
Properties	Method	Conditions	Value
Density	ISO 1183	-	0.92 g/cm ³
Elongation at break	IEC 60811-501	50 mm/min	600 %
Hardness	ISO R 868	1 Sec	50 D
Radiation resistance	IEC 60544	-	10 ⁶ Gy
Tensile strength	IEC 60811-501	50 mm/min	15 MPa
Water absorption	-	-	-

Thermal			
Properties	Method	Conditions	Value
Combustion corrosivity	-	-	-
Continuous temperature rating	IEC 60216	20,000 hrs	+ 70 °C
Flammability	-	-	-
Flame propagation	-	-	-
Oxygen index	-	-	-
Smoke density	-	-	-
Smoke index	-	-	-
Temperature index	-	-	-
Toxicity index	-	-	-

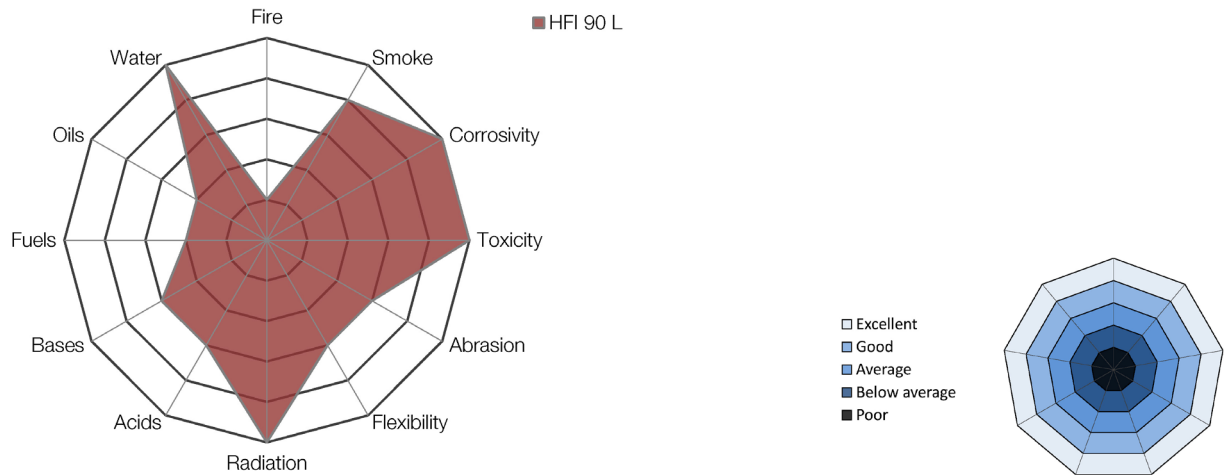

Available colours (shades may vary from material to material)											
Black	Brown	Red	Orange	Yellow	Green	Blue	Violet	Grey	White	Pink	Clear

Characteristics and key properties

HFI 90 L is a low cost insulation with very good mechanical and electrical properties making it ideal for use in data cables (twisted pairs and coaxials). As one of the purest materials available, HFI 90 L is the preferred option for coaxial dielectrics. HFI 90 L is halogen free but is not flame retardant. Although HFI 90 L has mixed chemical resistance properties, it is one of the best options for use in water.

+90°C
High temp

-60°C
Low temp

Important: Habia Cable has compiled the information contained herein from what it believes to be accurate and factual sources as of the date printed. Data is based on typical values and might vary depending on cable construction and processing method. Any changes in the data will be made without notification.

Insulation

DISCLAIMER: Information is indicative and cannot be considered a binding representation or warranty for products and their use.