


# Delivery spools

Plastic spool types

## Reel dimensions

Plastic delivery spools								
Type	Dimension							Weight
	A	B	C	D	E	F	G	
	mm	mm	mm	mm	mm	mm	mm	kg
SD100/60K	16.5	60.0	100.0	38.0	45.0	25.0	3.5	0.06
E 100	16.0	80.0	100.0	80.0	100.0	20.0	7.0	0.09
E 125	16.0	80.0	125.0	100.0	125.0	20.0	7.0	0.15
E 160	22.0	100.0	160.0	128.0	160.0	32.0	13.0	0.25
SH370K	305.0	311.0	370.0	70.0	80.0	-	-	0.41
E 200	22.0	125.0	200.0	160.0	200.0	32.0	13.0	0.45
SD300K	51.5	212.0	300.0	91.0	103.0	44.5	11.0	0.65
K125	16.0	80.0	125.0	100.0	125.0	20.0	7.0	0.08
K160	22.0	100.0	160.0	128.0	160.0	32.0	13.0	0.24
K200	22.0	125.0	200.0	160.0	200.0	32.0	13.0	0.50
K250	33.0	155.0	250.0	160.0	200.0	30.0	13.0	1.05
K355	33.0	220.0	355.0	160.0	200.0	80.0	25.0	1.85
B60	33.0	110.0	255.0	148.0	165.0	43.5	11.5	0.60
P3	75.0	110.0	280.0	265.0	285.0	43.5	9.5	0.73
P4	75.0	175.0	400.0	300.0	340.0	62.0	20.0	2.0
P5	75.0	202.0	480.0	340.0	380.0	65.0	20.0	2.0

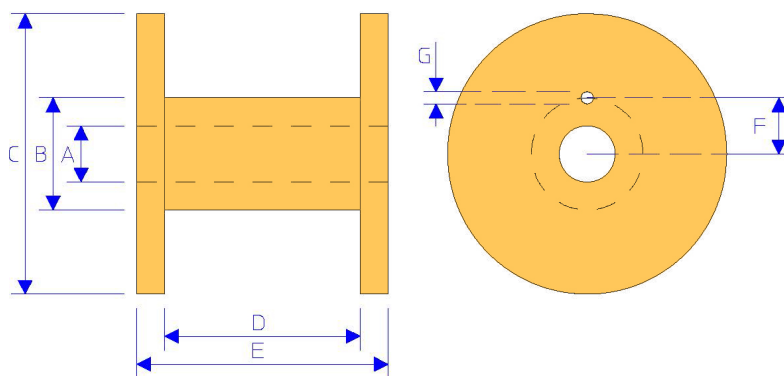

Habia Cable can deliver on a number of standard spool sizes provided that the inner diameter of the spool remains consistent with the cable's Minimum Bend Radius (MBR). For a simple guide, the dimension 'B' should be 20x the diameter of the cable (e.g. Spool SD100/60K has an inner diameter 'B' of 60mm. The maximum core size suitable for this drum would be 3mm).

Habia Cable will supply with a tolerance of  $\pm 10\%$ , in multiple random lengths (minimum length: 30m) on each spool unless otherwise stated. Bigger cables are typically supplied with all ends out and capped.


Options are also available for the supply of cable with all ends joined, one length per spool and with specific lengths and tolerances. Please ask for details.

# Delivery spools

Wooden spool types

## Reel dimensions

Wooden delivery spools								
Type	Dimension							Weight
	A	B	C	D	E	F	G	
	mm	mm	mm	mm	mm	mm	mm	kg
H400	35.0	200.0	400.0	200.0	230.0	85.0	22.0	3.0
H470	35.0	200.0	470.0	230.0	250.0	85.0	22.0	3.5
H500	35.0	200.0	500.0	270.0	325.0	85.0	22.0	4.3
H600	35.0	200.0	580.0	350.0	400.0	85.0	22.0	6.0
K6	75.0	250.0	600.0	400.0	464.0	100.0	40.0	12
K7	75.0	325.0	700.0	500.0	576.0	100.0	40.0	20
K8	75.0	375.0	800.0	500.0	576.0	100.0	40.0	25
K9	75.0	425.0	900.0	550.0	627.0	100.0	10.0	34
K10	107.0	500.0	1,000.0	600.0	715.0	150.0	50.0	46
K11	107.0	575.0	1,100.0	650.0	765.0	150.0	50.0	55
K12	107.0	675.0	1,200.0	850.0	980.0	300.0	50.0	90
K14	107.0	800.0	1,400.0	850.0	980.0	300.0	50.0	115
K16	107.0	950.0	1,600.0	850.0	1,012.0	300.0	50.0	195
K18	132.0	1,100.0	1,800.0	850.0	1,012.0	500.0	65.0	230

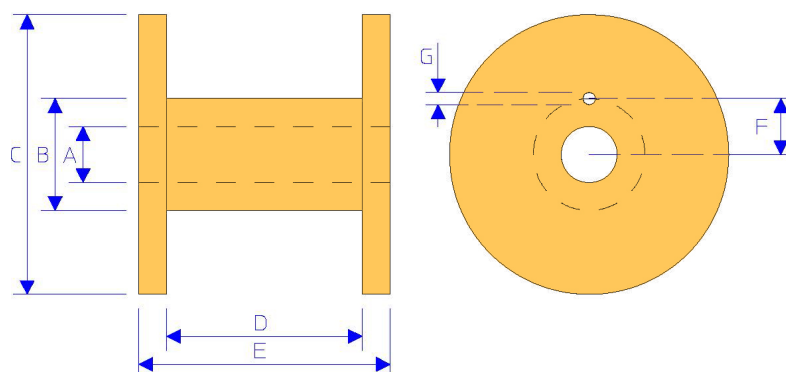

In addition to the plastic and wooden spools specified here, Habia Cable can also supply cables in crates, on barrels or on cardboard rings (large and small) and cut to length and bagged as required and depending on the product. Please ask for further details.